


* Illustrative images.

TECHNICAL SPECIFICATIONS

MODEL	LENS 2x6 IP66 90°
OPENING ANGLE C0-C180*	88°
OPENING ANGLE C90-C270*	89°
HORIZONTAL BEAM ANGLE(50%)	95°
VERTICAL BEAM ANGLE(50%)	94.9°
HORIZONTAL FIELD ANGLE(10%)	118°
VERTICAL FIELD ANGLE(10%)	138.4°
LED	5050
EFFICIENCY	≥ 90%
PHOTOMETRIC CLASSIFICATION* (NEMA)	6 H x 7 V
DIMENSION(mm/in)	172 x 70 x 11 / 6.77 x 2,75 x 0,43
MATERIAL	POLYMETHYL METHACRYLATE / POLYCARBONATE
OPERATING TEMPERATURE	85°C
GASKET	SILICONE GASKET
WARRANTY	2 YEARS SUBJECT TO TECHNICAL EVALUATION

TECHNICAL DRAWING

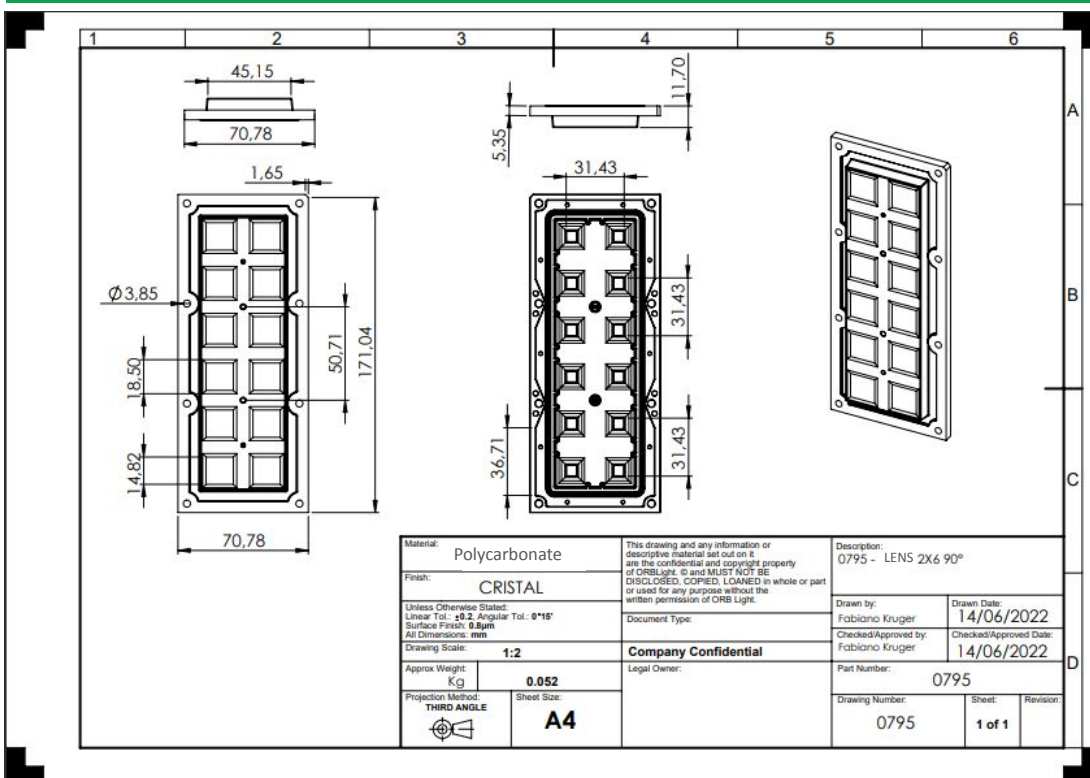

* Possible variation due to the constructive characteristics of the product where the lens is being mounted;

** All results were obtained through photometric test with OSRAM 5050.